


MAGNUM

LIME

Spreading width up to 16 m



		SPREADING WIDTH	
		Lime	
		12 m	16 m
CAPACITY [l/ha]	MIN (10 mm)	551	413
	MAX (120 mm)	6.618	4.963

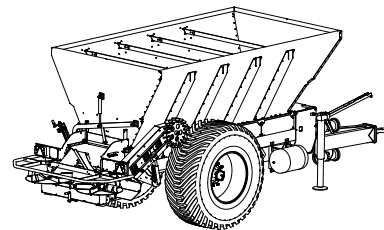

Models	Capacity (m³)	Weight (kg)	Length (cm)	Width (cm)	Height (cm)	Tractor Power (HP)
MAGNUM	8.5	3200	733	267	263	120

Features:

Spreading width	12 – 16 m
Spreading height	80 cm
Tyres	650/65 R 30,5
Maximum load	13 000 kg
Axle	Square single-axle 130×130 mm; Brake 406×140
Belt conveyor	Belt width: 800 mm Ø Drive roller: 250 mm Ø Driven roller: 250 mm
Belt driving wheel	Ø 445 x 126 mm
Lime opening measures (Gate)	780×120 mm [width × height max]
Spreading discs	Ø 700 mm, 5 vanes for each disc

On all mechanical models: Varnished steel hopper – Manual flow regulation – PTO shaft – 650/65 R 30,5 tyres – Discs for spreading lime up to 16 m – Tail lights – Inspection ladder – Line holder – Pneumatic brakes – Semi mudguards – Chain harrows – Document holder

On all hydraulic models: Varnished steel hopper – Manual flow regulation – PTO shaft – 650/65 R 30,5 tyres – Discs for spreading lime up to 16 m – Tail lights – Inspection ladder – Line holder – Pneumatic brakes – Semi mudguards – Chain harrows – Document holder – Computer for data management – Wheel speed sensor – Electrical wiring – Hydraulic motor belt control – Speed sensor of the belt – Hydraulic disc drive – Disc speed sensor